

# STORABLE SWIMMING POOLS

## ELECTRICAL WIRING REQUIREMENTS

2008 National Electrical Code / 2010 Residential Code of New York State  
[www.InspectNY.com/codes](http://www.InspectNY.com/codes)

**STORABLE POOLS** ARE THOSE THAT ARE CONSTRUCTED ON OR ABOVE THE GROUND, AND ARE CAPABLE OF HOLDING WATER TO A MAXIMUM DEPTH OF 42 INCHES (1.0 M), OR A POOL WITH NON METALLIC, MOLDED POLYMERIC WALLS, OR INFLATABLE FABRIC WALLS REGARDLESS OF DIMENSION. (The maximum water depth of 42" does not apply to inflatable swimming pools)

### 1) Storable Pool Pumps

- a. A cord-connected pool filter must incorporate an approved system of double insulation or equivalent
- b. Cord-connected pool filter pumps must be provided with a ground-fault circuit interrupter (GFCI) that is an integral part of the attached plug or located in the power supply cord within 12" of the attached plug.

### 2) Receptacle (Outlet) and Wiring Method for Storable Pool Pump


- a. Receptacles cannot be located within 6' of the inside wall of a storable pool
- b. The receptacle must be grounded and must be Ground Fault Circuit Interrupter (GFCI) protected.
- c. Receptacle must have a weatherproof cover that can be closed when the cord is plugged in. (In-use type cover)
- d. An Automatic Timer (Time Switch) must be installed on storable swimming pool pumps.

### 3) Luminaries (lights) for Storable Pools (if used)

- a. Luminaries cannot have exposed metal parts and must be listed for the purpose
- b. Luminaries 15 Volts or Less Must:
  - i. Have a luminaire lamp that operates at 15 volts or less
  - ii. Have an impact-resistant polymeric lens, luminaire body, and a transformer enclosure
  - iii. Have a transformer listed for swimming pools with a primary rating not over 150 volts
- c. Luminaries Over 15 Volts But Not Over 150 Volts:
  - i. Have an impact-resistant polymeric lens and luminaire body
  - ii. Have Ground Fault Circuit Interrupter (GFCI) protect

### 4) Other

- a. Building Permits are required. Secure a Building Permit prior to beginning work from your municipality
- b. Pool Alarms may be required (Check with your local Building Department for additional information)
- c. All receptacles located within 20' of the inside walls of a storable pool wall must be GFCI protected

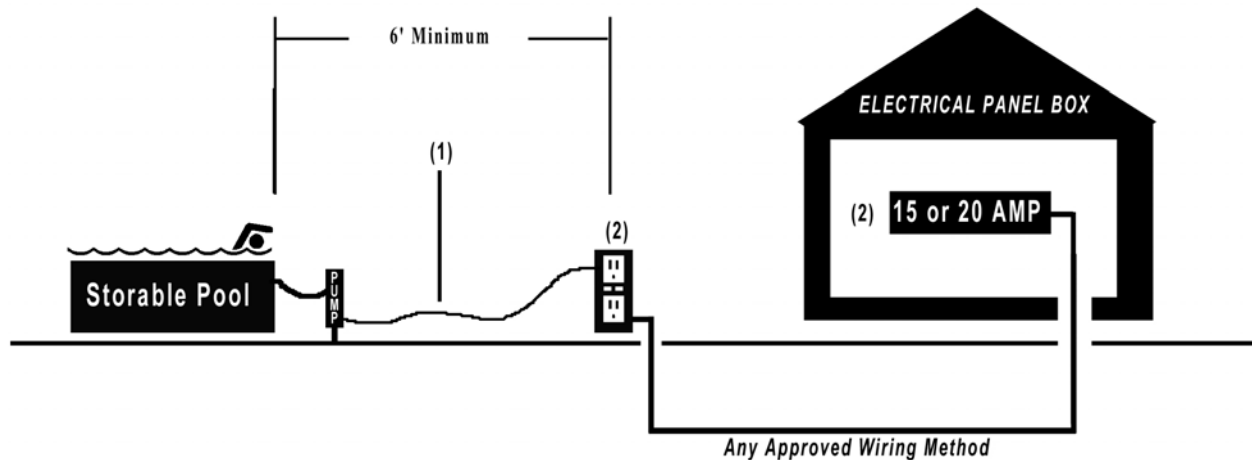

**PLEASE CONTACT YOUR LOCAL INSPECTOR IF YOU HAVE ANY QUESTIONS**

**Fritz Gunther – Professional Electrical Inspector**

2767 Dewey Avenue \* Rochester, New York 14616 ~ (585) 436-4460 \* [www.InspectNY.com](http://www.InspectNY.com)

~ 2011 ~